

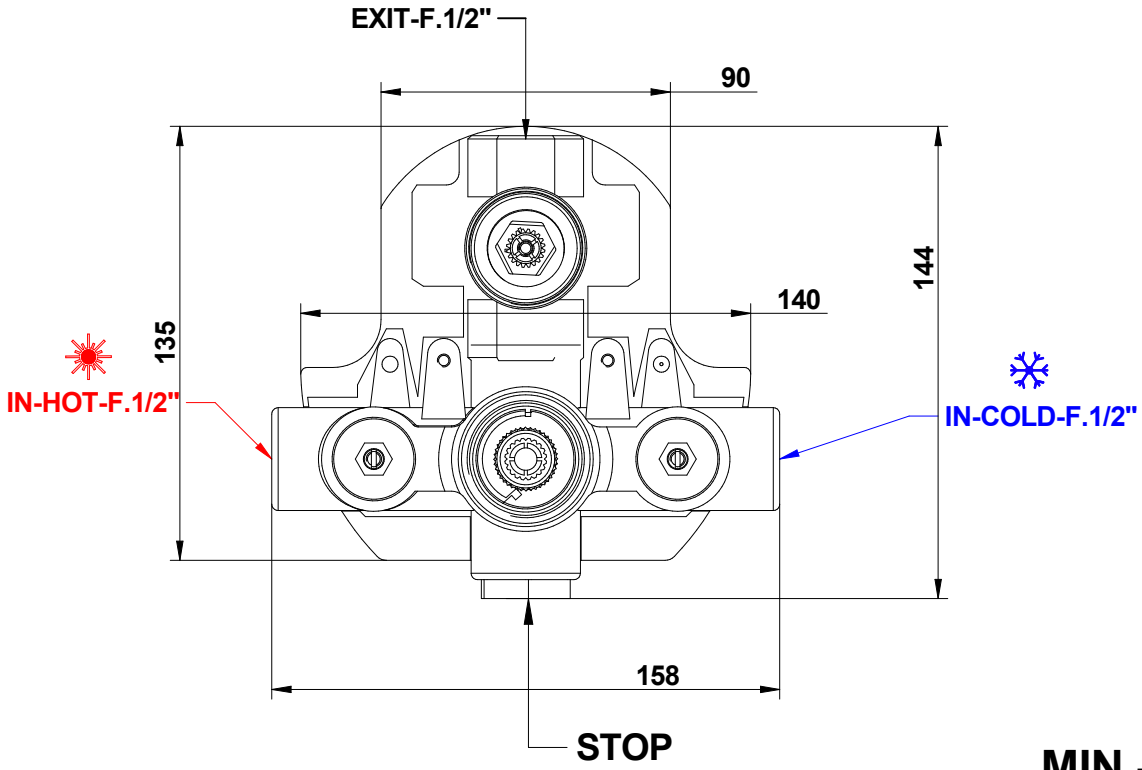


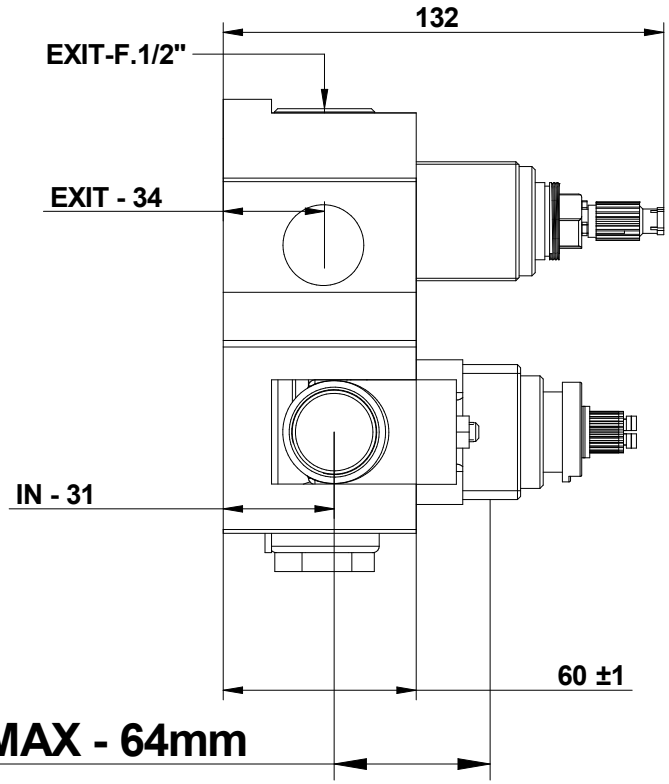

MIN - 47mm -- MAX - 64mm

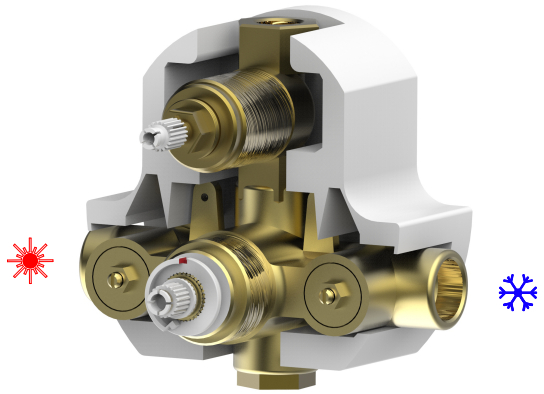

Condizioni di funzionamento

Temperatura dell'acqua calda e fredda:

Temperature dell'acqua calda
Massima: 85°C
Minima: 10°C superiore alla temperatura desiderata per l'acqua miscelata
Raccomandata: 65°C
La differenza minima tra temperatura di alimentazione dell'acqua calda e temperatura massima di acqua miscelata è 10°C.

Pressioni di servizio

Massima: 5 bar
Minima: 1 bar
Raccomandata: 2 bar
Per garantire il funzionamento ottimale del miscelatore è importante che le pressioni di servizio (acqua calda e acqua fredda) siano il più possibile bilanciate.
Se la pressione è superiore a 5 bar è necessario installare un riduttore di pressione a monte del miscelatore.

OPERATING RULE

Hot & Cold water temperature:

Hot water temperature
Maximum: 185° F
Minimum: 50 ° F higher than the desired temperature for mixing water
Recommended: 149° F
The slightest difference between the supplied hot water and the maximum mixing water temperature is 18°F.

Operating Pressures:

Maximum: 72.5 psi
Minimum: 14.5 psi
Recommended: 29 psi
To grant the best functioning of the mixer it is important that the operating pressures (hot & cold water) are balanced as much as possible.
If the pressure is higher than 72.5 psi it is necessary to install a pressure reducer on the mixer.

Art- 9787

© Copyright of Mario Bongio s.r.l.

Corpo incasso per miscelatore termostatico per/art.:
30544 - 31544 - 32544 - 65544 - 06544 - 11544- 12544 - 04544 - 05544 02544 - 15544 - 19544 - 22544 - 17544 - 23544 - 21544 - 09544

Built-in body for thermostatic mixer for/items:
30544 - 31544 - 32544 - 65544 - 06544 - 11544- 12544 - 04544 - 05544 02544 - 15544 - 19544 - 22544 - 17544 - 23544 - 21544 - 09544

Mario Bongio s.r.l.
Via Aldo Moro, 2
28017 San Maurizio d'Opaglio (NO) - Italy
tel: +39 0322 967248 fax: +39 0322 950012
www.bongio.com - info@bongio.it